

Oxy-Fuel Combination Torch

Confidence in cutting, heating and welding

Graf-Tite® Soft Seat Tip

Protects the tip seat from nicking, if dropped, for longer use

In-Tip Gas Mix

Gases are mixed at the tip, minimizing the risk of a sustained backfire

Slip-in Tip

No wrench is needed, allowing for quick and easy tip changes

Silver-Brazed Nickel-Plated Torch Joints

Provides strength, leak resistance and heat deflection

Three Tube Construction

Keeps gases separate in the cutting attachment until mixed at the tip for safety

Center Pre-Heat Valve

Usage for both left- and right-handed operators


Flo-Trol Valve

Eliminates seat burn out due to reverse flow of mixed gases

*SC200 and MC500 Series only

Straight Bore with Triple O-Rings

Easy 360-degree torch attachment rotation for best position and to reduce fatigue

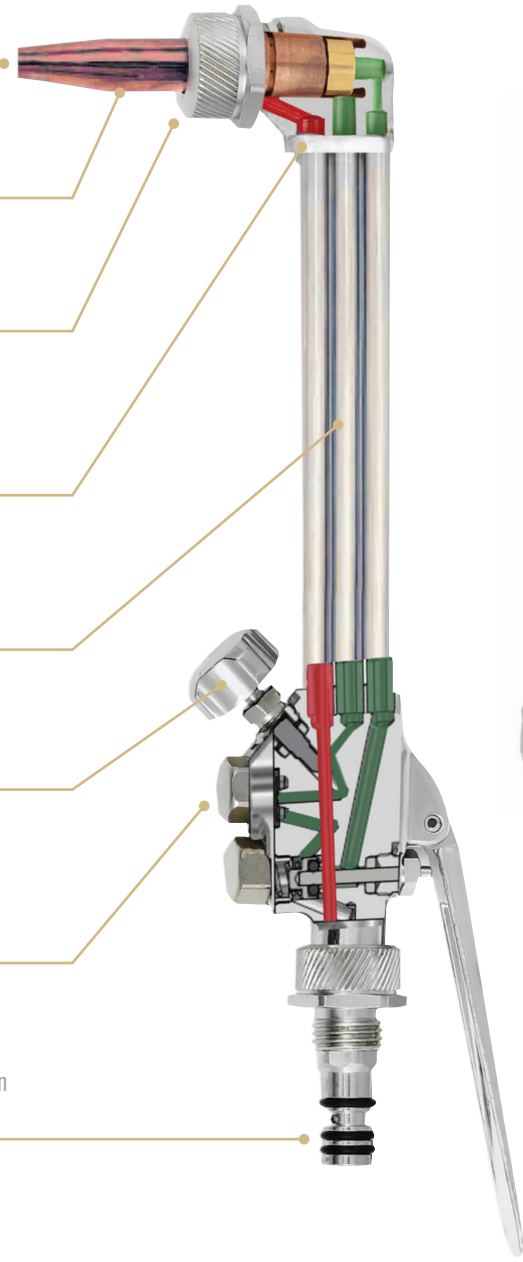

Internal Threads

Threads are protected from damage if torch is dropped

Nickel Finish

Deflects heat and resists corrosion

Riveted Knobs

Will not come loose from the valve stem

